



redz-sc.com

hi@redz-sc.com


# HUR618 Modbus RTU Remote I/O Device

with 8 Channel 0–10 V and 0–20 mA  
Selectable Analog Input and 1 × RS485



# Main Features

- Device Address changeable with Modbus RTU commands
- Easy to Monitor Device Parameters such as Device Up Time, Modbus RTU read counter etc. with Modbus Commands
- Supports Modbus RTU Protocol over RS485 with 19200 8N1 Data Type
- Easy to Use Test and Parameter Change Software with Free C# codes
- Easy Firmware Upgrade over Serial Line
- 90 - 265 V AC (100 – 370 V DC), 47 Hz to 63 Hz AC wide range power input
- Wide operating temperature range from -25 to 70 °C
- Rugged Metal IP-40 housing design
- DIN-Rail mounting

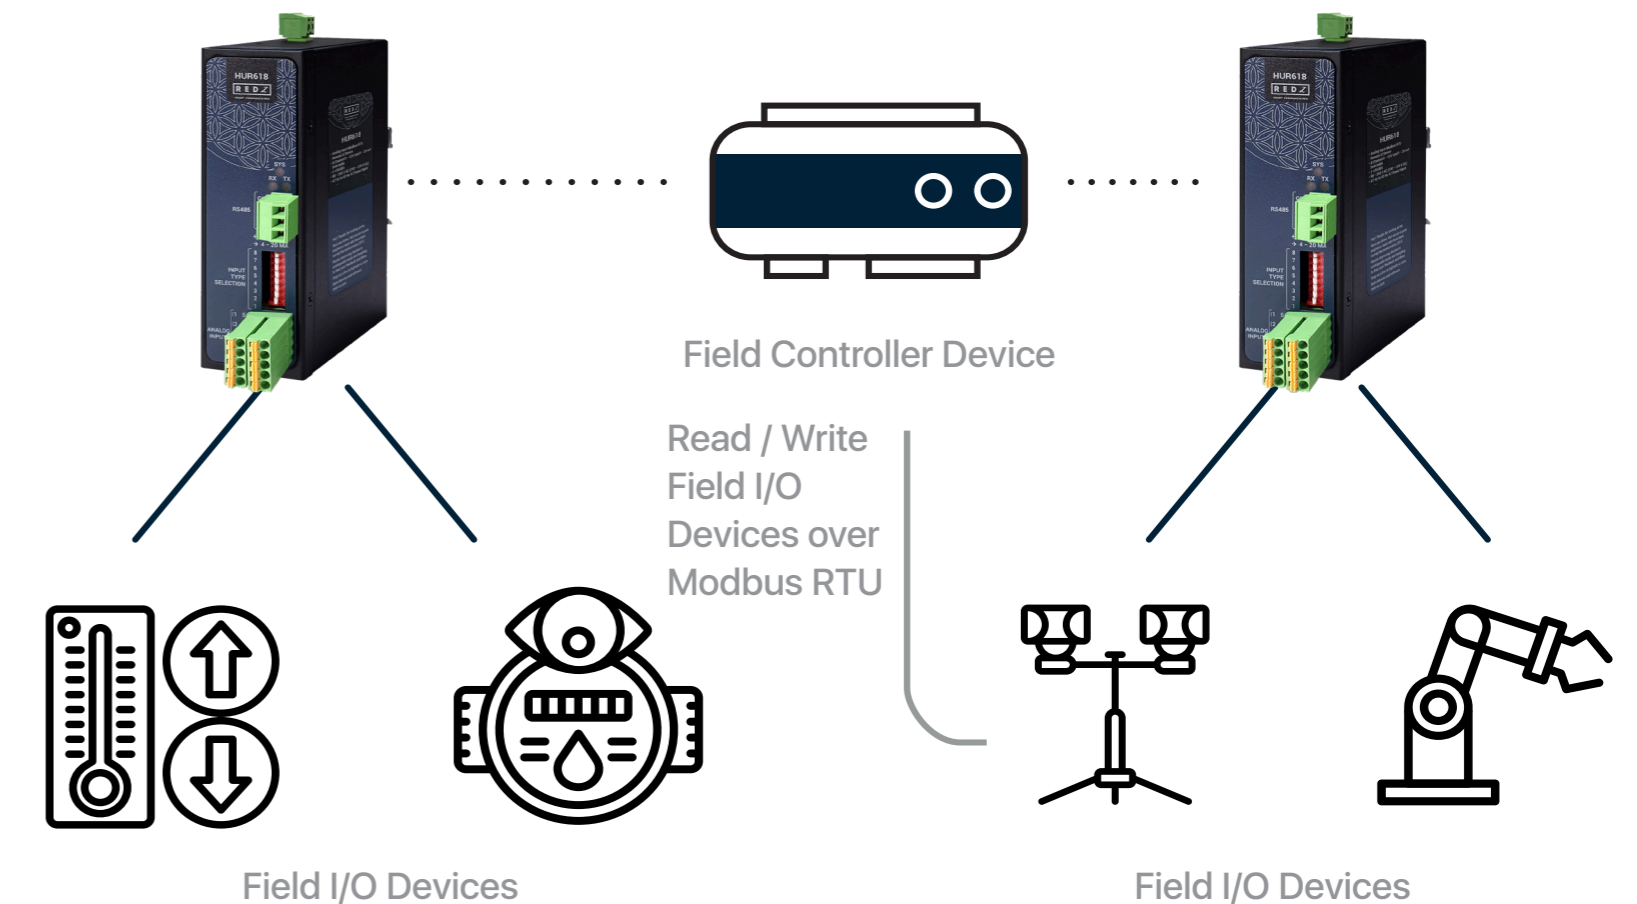

**HUR Series Modbus RTU Remote Input/Output (I/O) Devices are designed for facilities of rugged industry and infrastructure.**

HUR Series Modbus RTU Remote I/O Devices are tailored to perform various features such as wide temperature, wide range power input range... etc. HUR Series Modbus RTU Remote I/O Devices offers different I/O combinations, which provide greater flexibility and are compatible with many different applications. Easy to use test and parameter change software available and C# code for device driver can be shared with end client. HUR Series Modbus RTU Remote I/O Devices are the perfect choice for establishing a cost-effective remote I/O system.

# Technical Specifications

## Modbus RTU Characteristics

Protocol	<ul style="list-style-type: none"><li>• Modbus RTU</li><li>• 19200 8N1</li></ul>
Modbus RTU Address	<ul style="list-style-type: none"><li>• Default value is 0x01</li><li>• Changeable via Modbus Command</li></ul>
Monitoring Parameters	<ul style="list-style-type: none"><li>• Modbus RTU Read counter</li><li>• Time counter (in seconds)</li><li>• FW version</li><li>• available via Modbus Commands</li></ul>

# Input Connectors and Indicators

Input Connectors	<ul style="list-style-type: none"><li>• Terminal Connector for Analog Inputs</li><li>• 8 Channel Input terminals and polarity is important. All inputs references to Common point. 2 Common points and 8 Analog Inputs total 10 connection pins</li></ul>
Input Channel Ratings	0-10V and 0-20mA Individually Selectable Analog Inputs
Analog Input Features	16-bit resolution with no missing codes Throughput: 250 kSPS
Operation Mode Selection Switches	<ul style="list-style-type: none"><li>• 8 pin Switch to select operation mode of each Analog Input either 0-10V or 0-20mA</li><li>• Switch Position OFF: 4-20mA</li><li>• Switch Position ON: 0-10V</li></ul>

# Firmware Upgrade

Upgrade over Serial Line	Available from RS485 Serial Line
--------------------------	----------------------------------

# Interface and Indicators

RS485 Connector	Terminal Connector for 2 wire RS485 connection and GND
Activity LEDs	<ul style="list-style-type: none"><li>• Tx LED: Flashes when the device sends Modbus RTU packages</li><li>• Rx LED: Flashes when the device receives Modbus RTU packages</li></ul>
System LED	Flashes during normal operation



# Power

Input Range	90 - 265V AC (100 – 370V DC), 47Hz to 63Hz AC input
Isolation	Fully Isolated > 4200 Vrms, 5 mA 1 Min Insulation: Class II

# Physical and Environmental Characteristics

Enclosure	Metal, IP 40
Dimensions	43 × 95 × 124 (w × d × h) mm
Weight	~ 380 gr
Storage Temperature	- 40 to 105 °C
Operating Temperature	- 25 to 70 °C
Operating Humidity	5 % to 95 % Non-condensing



# Ordering Information

HUR618: 8 Channel 0-10V and 0-20mA Selectable Analog  
Input Modbus RTU Remote IO Device, 1 × RS485, 90 - 265V AC  
(100 – 370V DC), 47Hz to 63Hz AC Power Input

## Product Selection

Model	5 – 60V DC Power input	90 - 265V AC (100 – 370V DC), 47 Hz to 63 Hz AC Power Input	1 × RS485 port	8 Channel 5-275V AC-DC, 100mA Digital Optocoupler Output	8 Channel Digital 5Amp. Relay Output	8 Channel 12- 275 AC-DC, 60mA Digital Optocoupler Input	8 Channel 0-10V and 0-20mA Selectable Analog Input	5 Channel 4-20mA Analog Output
HUR118	●		●	●				
HUR128	●		●		●			
HUR218		●	●	●				
HUR228		●	●		●			
HUR318	●		●			●		
HUR418		●	●			●		
HUR518	●		●				●	
HUR555	●		●					●
HUR618		●	●				●	
HUR655		●	●					●